

B200LDA L.E.D. permanent beacon

The B200 series is comprised of a Xenon strobe beacon, permanent filament bulb, blinking filament bulb and a permanent LED array beacon version.

The surface mount base can also be supplied with a right angle bracket or with a pole mounted assembly.

Part codes:

Version:	Part code:
10-30V dc	B200LDA030B/[x]
90-230V ac	B200LDA230B/[x]


[x] = Lens colour:

A: Amber
B: Blue
C: Clear
G: Green
R: Red
Y: Yellow

Features:

- Bayonet fixing lens.
- Anti-tamper locking screw.
- Stainless steel fixings.

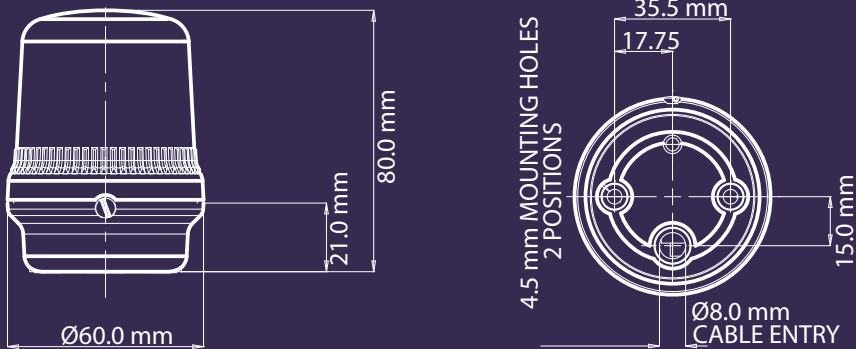

**Specification:**

Light source:	9 x High power L.E.D's
Lens/L.E.D. colours:	Amber, Blue, Clear (White L.E.D.), Green, Red & Yellow
Lens type:	Prismatic (standard) or plain
Peak/Effective Intensity cd:	5.5 cd*
Mounting:	Surface mount (right angle or pole mount accessories available)
Ingress protection:	IP65
Housing/lens material:	High impact UL94 V0 (f1) PC
Terminals:	0.5 to 1.5mm ²
Operating temperature:	-25 to +50°C
Storage temperature:	-40 to +70°C
Relative humidity:	90% at 20°C.
Weight :	78g

*Candela measurements representative of performance with amber lens at optimum voltage.

Current consumption:

Version:	Current mA:
10-30V dc	80mA
90-230V ac 50/60Hz	32mA

Accessories:

B200RAB001

Wall bracket



B200TMA001

Pole mount assembly
(140mm)

