

KombiSIGN 71 / Audible Devices 645

Vocal element 24VDC BK



Part No.:	645.840.55
Series:	KombiSIGN 71



MECHANICAL DATA	
Height	110 mm
Diameter	70 mm
Materials	PC
Housing colour	Black
Protection category	IP65
Service life optical	5,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	290 g
Product weight	184 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	400 mA
Rated inrush current	<1A
Protection class	Protection class 2
Pollution degree	2


ACUSTICAL DATA	
Volume/dB(max) at 1m distance	88,0 dB dB(A)
Volume adjustable	Potentiometer
Volume adjustment range	10-100%

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / Audible Devices 645

Vocal element 24VDC BK

DRAWING

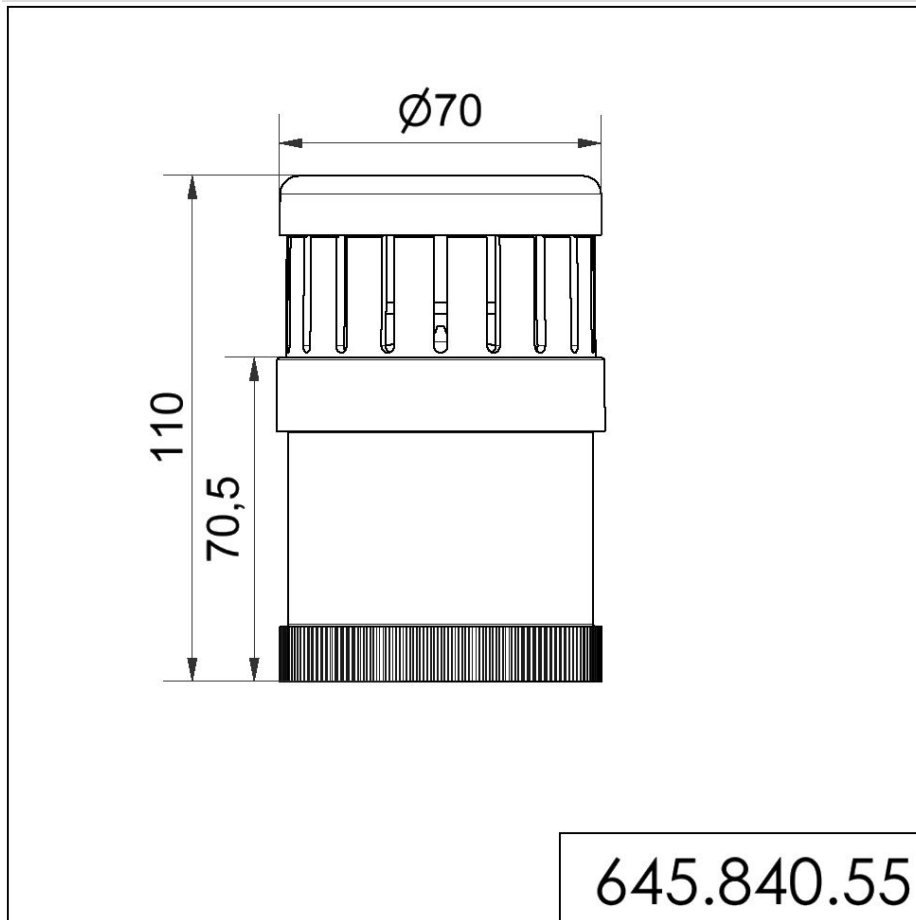

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.