

*intelligent light*  
**ADALIT**

**L-3000**

**PROFESSIONAL** safety torch



| Product Information  
| Functional Features

# L-30




II 1G Ex ia IIC T4 Ga  
II 1D Ex ia IIIC T85 °C Da

**HIGH INTENSITY**



0°  
45°  
90°



200  
LUMENS



200  
M



10000  
CD



Li-ion  
RECHARGEABLE



04 h 06 h 08 h



Technology  
**LedEngine**



**Product  
Information**

**Functional  
Features**





Adalit L.3000 torch is a high performance professional safety torch that combines high intensity LEDs, a revolutionary optic, a large digital display and an elegant design.



- ✓ 2 LEDs of 135 lumens each in a double optic with different light beams.
- ✓ LedEngine technology with a step light system.
- ✓ Only focused light on, "Booster" function to illuminate long distances with greater penetrating light beam.
- ✓ Two button switches of soft touch material, ergonomic and oversized in order to guarantee easy pushing.
- ✓ 3 different burning intensities in order to select in every moment the remaining burning time.
- ✓ Battery level indication in hours and minutes by means of a digital display.
- ✓ Swivelling head with 3 positions 0° | 45° | 90°
- ✓ Torch body made of high resistance thermoplastic resin to the impacts, extreme temperatures and corrosion.

*intelligent light*

PROFESSIONAL

Ex



Led Engine  
Technology

HIGH INTENSITY



ATEX  
ZONE 0




Technology  
**LedEngine**

New step lighting  
system, now you can  
watch your step



# Functional Features

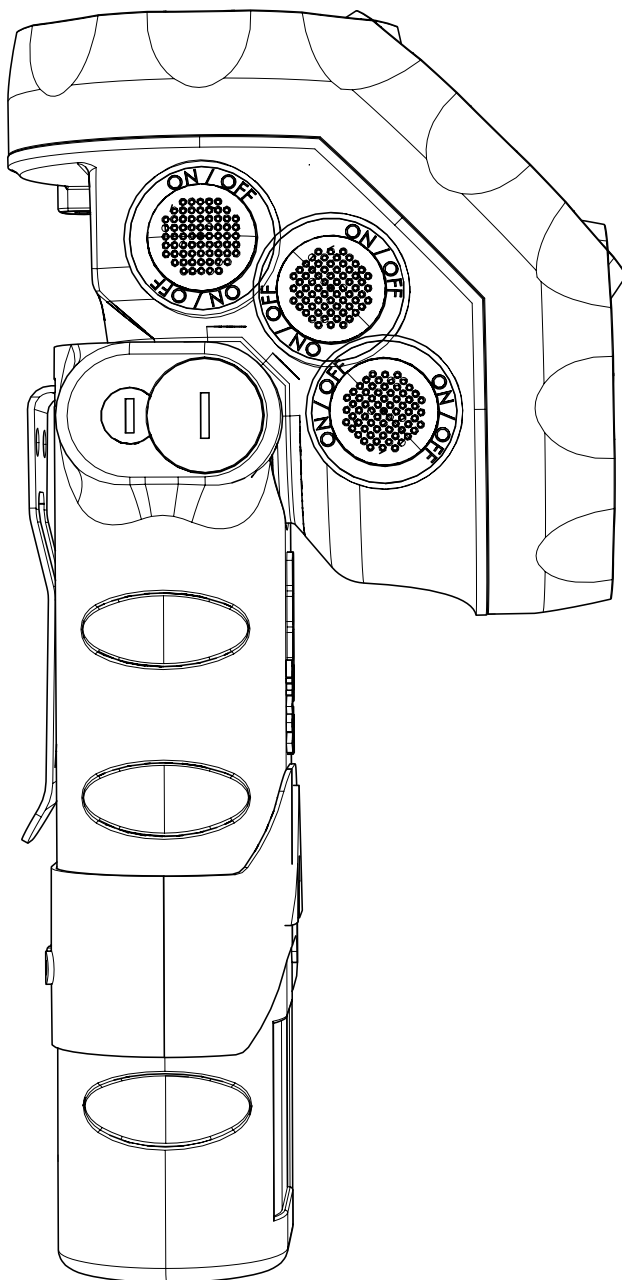

## Adalit L3000 Torch

ATEX Certificate LOM 12ATEX2087 X

II 1G Ex ia IIC T4 Ga IP67 | II 1D Ex ia IIIC T85 °C Da

Ingress Protection: IP67

Weight: 500 g.

Measures: 225 x 70 mm (L x Diam. Ø)

### Burning Time System

3 different intensity levels that can be chosen by the user in order to choose the correct burning time in every moment with a minimum of 4 hours use of maximum intensity, 6 in the intermediate and 8 hours at the minimum.

**Burning time** Real time in hours and minutes thanks to the digital display.

### Low Battery Warning

Blinking signal of the main LED 15 min. before the batteries get off.

### Material

High resistance thermoplastic resin to the impacts, extreme temperatures and corrosive substances. Two button switches of soft touch material, ergonomic and oversized in order to guarantee easy pushing.

**Swivelling Head** 3 positions: 0° / 45° / 90°.

**Lighting Source:** 2 high intensity LED's with 135 lm. | Total light intensity 200 lm.

### Special Double Optics

FLOOD light on - the unique "step lighting system" to light the ground area just ahead user's feet. FOCUSED light on - "BOOSTER" function to illuminate long distances with a greater penetrating light beam.

**Battery:** Type: Lithium | Voltage: 3,7 V.

**Accessories:** Holster, Nylon with high visibility | Magnet with high pull strength.

## Chargers

Marking: CE e9

Ingress Protection: IP54

Disconnection at the end of the charge: Automatic

Charge Indication: Red LED: charging | Green LED: charged

Feeding Source: DC: 12 V. / 24 V. | AC: 100/240 V. 50/60 Hz

### Type and Dimensions:

Single: 75x105x60 mm.

Charging rack for 3 torches: 205x105x60 mm.

Charging rack for 5 torches: 405x105x60 mm.




www.adalite.es



European  
high quality

**ADALIT**  
professional



●●● The Light Company  
**ADARO**

ADARO Tecnología, S.A.  
Parque Científico y Tecnológico de Gijón  
-EDIFICIO ADARO-  
33203 GIJÓN-ASTURIAS-SPAIN

Customer Service:  
Tel.: +34 985 347 806  
Fax: +34 985 358 378  
info@adalit.es