


## Ex safety switches with separate actuator // Ex ST 14 10/1S 2m Order no.: 14053912

### Features/Options

- Ex zone 1 and 21
- Thermoplastic enclosure
- Double insulated

- With pre-wired cable
- N.B.: Please state required approvals for Russia, China and Brazil with your order!

### Dimensions

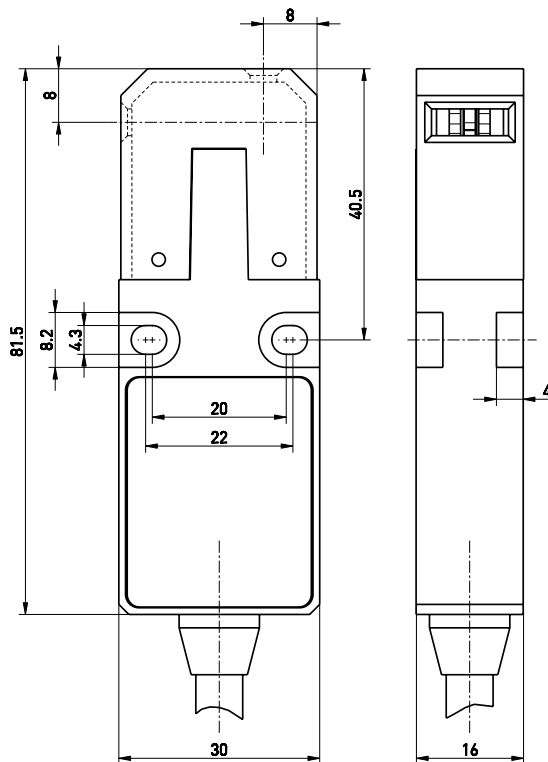


### Technical data

<b>Standard</b>	EN 60947-5-1; EN 1088; EN 60079-0, EN 60079-1, EN 60079-31; EN ISO 13849-1
<b>Enclosure</b>	glass-fibre reinforced, shock-proof thermoplastic, self-extinguishing UL 94-V0 stainless steel 1.4301
<b>Actuator</b>	IP 65 according to EN 60529
<b>Degree of protection</b>	silver
<b>Contact material</b>	slow action, positive break NC contact $\ominus$
<b>Switching system</b>	change-over contact with double break Zb, galvanically separated contact bridges
<b>Switching elements</b>	cable H05VV-F 4 x 0.75 mm <sup>2</sup> 2 million max. 20 years
<b>Connection</b>	2m
<b>B<sub>10d</sub> (10% Load)</b>	4 kV
<b>T<sub>M</sub></b>	250 V
<b>Cable length</b>	T6: 6 A; T5: 3 A
<b>U<sub>imp</sub></b>	6 A/250 VAC; 4 A/24 VDC; 0.25 A/230 VDC
<b>U<sub>i</sub></b>	AC-15, DC-13
<b>I<sub>the</sub></b>	6 A gL/gG D-fuse
<b>I<sub>e</sub>/U<sub>e</sub></b>	8 mm
<b>Utilisation category</b>	T6: -20 °C ... +65 °C, T5: -20 °C ... +95 °C
<b>Max. fuse rating</b>	> 1 million operations
<b>Positive break travel</b>	<b>Mechanical life</b>
<b>Ambient temperature</b>	<b>Ex marking</b>
	⊕ II 2G Ex d IIC T6/T5 Gb, ⊕ II 2D Ex tb IIIC T80°C/T95°C Db IP 65 IECEx Ex d IIC T6/T5 Gb, Ex tb IIIC T80°C/T95°C Db
	<b>Approvals</b>
	PTB 03 ATEX 1070 X; IECEx PTB 06.0098X

### Switching diagram

Slow action  
1 NC/1 NO contact



Errors and omissions excepted.