



- Competitively priced LED beacon
- New LED technology with upward illumination
- LED Permanent Beacon with M 22 thread for the control panel/switch-gear programme

Life duration up to 100,000 hrs

i TECHNICAL SPECIFICATIONS:

Dimensions (Ø x Height):	29 mm x 32 mm (Protrusion from panel)
Housing:	PC/ABS-Blend
Lens:	PC, transparent
Connection:	2 wires, c. 105 mm long
Fixing:	Installation mounting for Ø 2.5 mm (M 22 x 1.5 mm)

Nut and seal included in assembly.

🛒 ORDER SPECIFICATIONS:

Voltage	24 V $\overline{=}$
Current consumption	30 mA
red	231 104 55
green	231 204 55
yellow	231 304 55
clear	231 404 55
blue	231 504 55

⚠️ ADDITIONAL INFORMATION:

LED Installation Beacon 231 Economy attains an extremely high level of visibility thanks to completely new LED technology with upward illumination.

This cost-effective and innovative solution draws upon the most advanced technology and is furthermore resistant to vibration and other mechanical stress.

The LED Beacon 231 has an M 22 thread and is especially suitable for use in control panel/switch gear applications.



Upward illumination


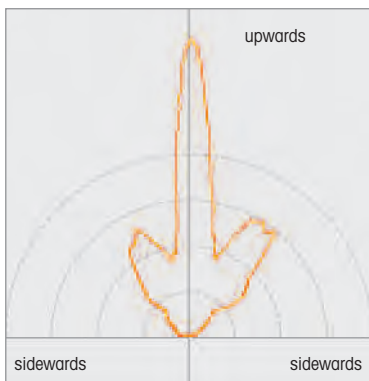


Illustration of the light distribution for the Economy LED Installation Beacon 231

📐 TECHNICAL DIAGRAMS:

see page 270

Sizes of Permanent Beacons



Technical Diagrams

