



Filetage Threads	Capacité Clamping range	H mm	E mm	L mm	PE Court ■	Colisage Packing	Joint Sealing ring	Ecrou Lock nuts
PG 09	4,5 - 8,0	19	8	32	Z7100900E	50	D9109001	D4009108
PG 11	5,5 - 10,5	22	8	35	Z7101100E	50	D9111004	D4011101
PG 13	7,0 - 12,0	24	9	36	Z7101300E	50	D9113008	D4013105
PG 16	9,0 - 14,0	27	10	40	Z7101600E	50	D9116009	D4016106
PG 21	11,5 - 18,0	33	11	44	Z7102100E	20	D9121003	D4021100
PG 29	16,0 - 24,5	42	12	55	Z7102900E	20	D9129009	D4029106



Matière : Polyamide 6 Fv  
Material : Polyamid 6 Fv



Mode de protection  
Type of protection : Ex e



Suivant normes  
Conformity with standards : EN 60079-0, EN 60079-7,  
EN 60 079-31



Groupe d'appareils  
Device group : II



Catégories  
Category : 2 et 3



Atmosphères  
Atmospheres : G / D



Zones  
Zones : 1, 2, 21, 22




Températures  
certifiées



+ 55°C

- 20°C

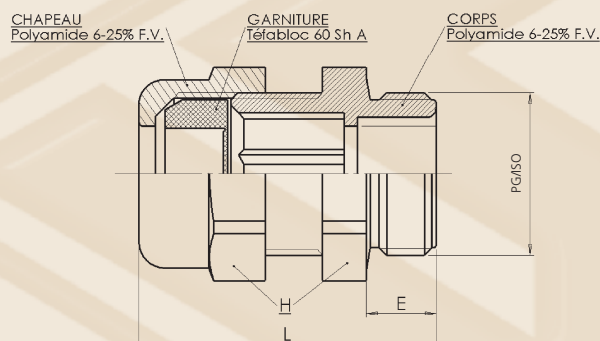

Certificats Certificates :

ATEX INMETRO  
GOST R



Filetage Threads	Capacité Clamping range	H mm	E mm	L mm	PE Long ■	Colisage Packing	Joint Sealing ring	Ecrou Lock nuts
PG 09	4,5 - 08,0	19	15	39	Z7110900E	50	D9109001	D4009108
PG 11	5,5 - 10,5	22	15	42	Z7111100E	50	D9111004	D4011101
PG 13	7,0 - 12,0	24	15	42	Z7111300E	50	D9113008	D4013105
PG 16	9,0 - 14,0	27	15	45	Z7111600E	50	D9116009	D4016106
PG 21	11,5 - 18,0	33	15	49	Z7112100E	20	D9121003	D4021100
PG 29	16,0 - 24,5	42	15	58	Z7112900E	20	D9129009	D4029106

\* Existe en version gris RAL 7001 / Also available in gray RAL 7001