




Operating Instructions for Band-It band & buckles

(A)


Bend the end of the band in a sharp V shape so that the end of the band on the underside of the buckle is a bit longer than the length of the buckle. Thread the band through the buckle like shown in fig. A.



(B)


Feed the band around the object and back again so it overlaps the buckle with 10 - 15 cm. Cut the band and feed it through the buckle from the other end.

Tension the band with the tool like shown on the next page.

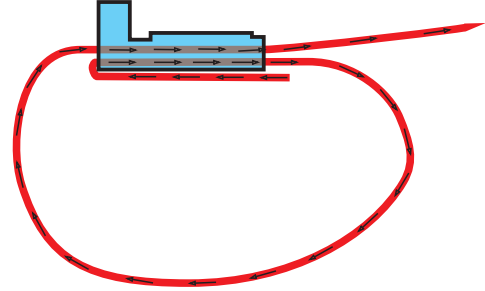


(C)

Bend the band back over the buckle and in between the locking ears. Cut the band so the end overlaps the locking ears with approx. 1 cm.

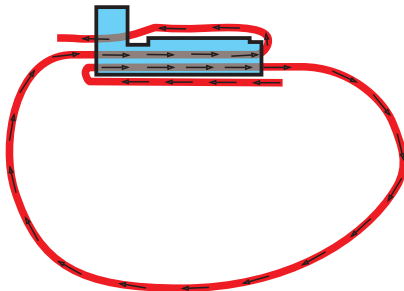

(D)


Hammer down the locking ears, to complete the clamp.

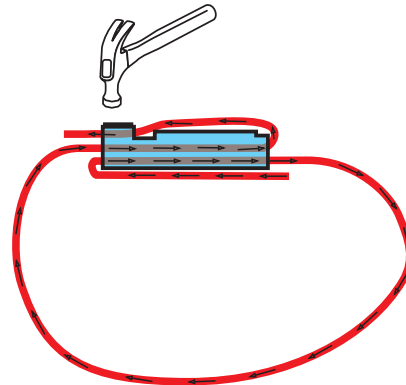



English


Operating Instructions for C07569 Bantam Hand Tool

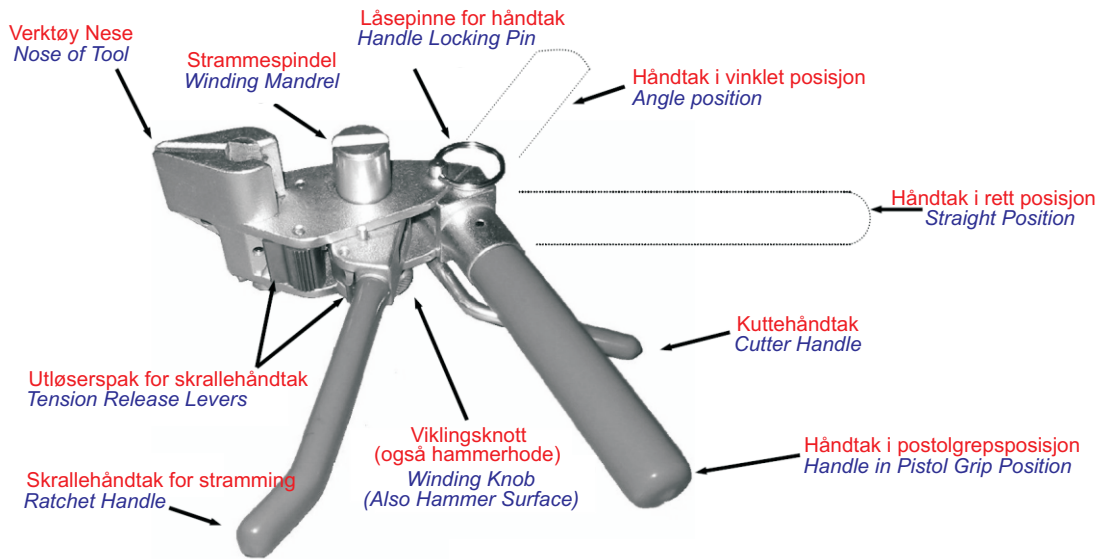


In Pistol Grip Position:



1. With the Bantam Tool in the Pistol Grip Position, Place the band in the tool with sufficient band in the winding mandrel.

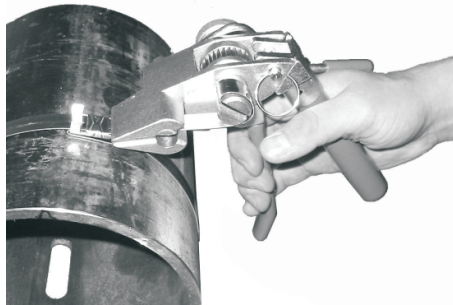


2. With ratcheting action, tension the band until clamp is tight. If necessary, band may be repositioned by releasing tension with levers.

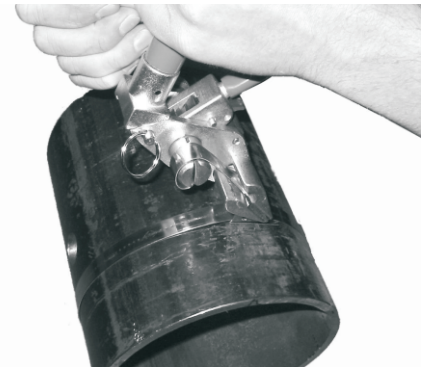

3. Roll tool over as far as tool will go, and push forward cutter handle. Remove tool and tap or hammer down ears of clip to complete clamp. Remove excess material from winding mandrel.


In Straight or Angle Position:

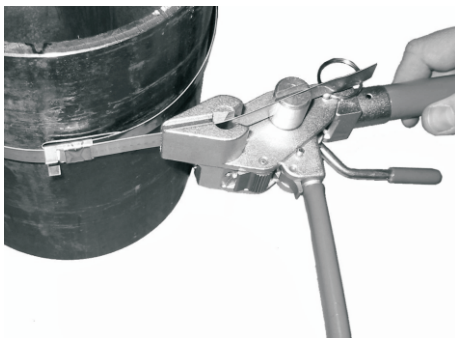

1. With the Bantam Tool in the Pistol Grip Position, Place the band in the tool with sufficient band in the winding mandrel.



2. With ratcheting action, tension the band until clamp is tight.

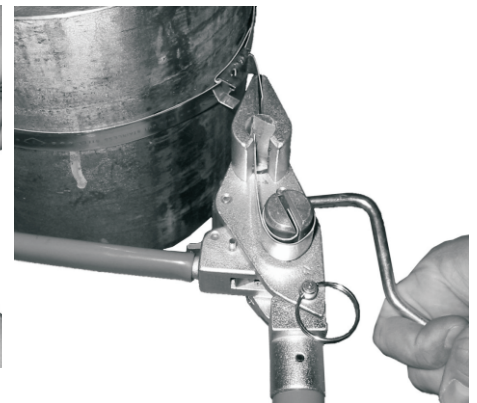

3. Roll tool over as far as tool will go, and push forward cutter handle. Remove tool and tap or hammer down ears of clip to complete clamp.