


Cable Glands M25 - long thread

Protection class to EN 60 529: IP 68 to 5 bar (30 min)
 Protection class to DIN 40 050-T9: IP 69K
 Flame protection: Glow wire test 750° C acc. to EN 60695-2-11
 Temperature range: -40°C to 100°C, temporarily up to approx. 120°C
 Material: - Cable Gland: Polyamide - Gasket EPDM
 Color: RAL 7035 Light grey
 Entry Thread Size: M25 x 1,5 mm
 Total Length [TL]: 43 - 52 mm
 Thread Length [L]: 15 mm
 Cable Acceptance [Ø]: 9 - 17 mm
 Dimensions Across Flats [SW]: 29 mm
 Package Quantity: 50 pcs.
 Article Number: 1242714

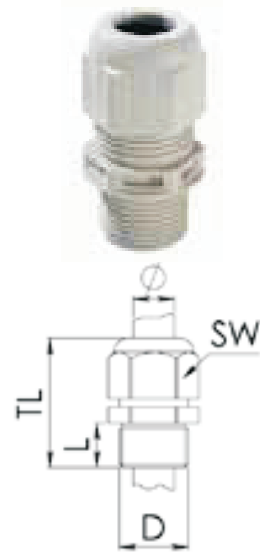

Stopping Plugs M25 - long thread

Protection class to EN 60 529: IP 66
 Flame protection: Halogen Free
 Temperature range: -40°C to 100°C
 Material: Polyamide 6/6
 Color: RAL 7035 Light grey
 Entry Thread Size: M25 x 1,5 mm
 Dimensions Across Flats [A]: 28 mm
 Thread Length [E]: 15 mm
 Package Quantity: 100 pcs.
 Article Number: 190256



Stopping Plugs M25 - normal thread

Protection class to EN 60 529: IP 56
 Flame protection: Halogen Free
 Temperature range: -40°C to 100°C
 Material: Polyamide PA6 (glass fiber reinforced)
 Color: RAL 7035 Light grey
 Entry Thread Size: M25 x 1,5 mm
 Thread Length: 8 mm
 Package Quantity: 100 pcs.
 Article Number: 1241815



Lock Nuts M25

Flame protection: Halogen Free
 Temperature range: -40°C to 100°C
 Material: Polyamide PA6 (glass fiber reinforced)
 Color: RAL 7035 Light grey
 Thread Size: M25 x 1,5 mm
 Thread Length [TL]: 6 mm
 Dimensions Across Flats [SW]: 32 mm
 Package Quantity: 100 pcs.
 Article Number: 1241706

